

**1/15 HP,  
115 AC**

ITEM 10-1747

**\$7.99**

• New UNIVERSAL ELECTRIC. Fan motor with thermal protection. Oil tubes to shaft bushings. Internal auxiliary centrifugal switch closes when motor reaches operating speed.

**SPECIFICATIONS**

- HP 1/15
- Voltage 115 AC
- Amps 1.03
- RPM 3345
- Rotation CW
- Phase 1
- Enclosure open
- Duty continuous
- Mount 3 studs from body
- Shaft 1/4" dia. x 7/8" w/flat
- Size 3 3/8" diam. x 4 5/8"
- Shpg. 5 lbs.



**0.115 HP, 120 VAC  
Motor**

ITEM 10-2519

**\$15.99**

• New, PROTECH Model 1-030-025 permanent magnet motor. Two M5-0.8 studs extend 1 1/2" from opposite end of face on 2 7/16" ctrs. Two tapped M5-0.8 holes on 2 5/16" ctrs. Motor is 120 VDC with built-in rectifier to operate on 120 VAC.

**SPECIFICATIONS**

- Power 0.115 HP
- Voltage 120 AC
- Amperage 1.5 Amps
- Speed 3620 RPM
- Rotation CCW
- Torque 32 in.-oz.
- Duty intermittent
- Mount face
- Shaft 5/16" diam. x 1 1/16" w/ flat
- Size 3" diam. x 4 1/4"
- Shpg. 4 lbs.



**72 RPM Motor**

ITEM 10-990

**\$29.90**

• Used SIGMA. Synchronous motor provides high torque. Rapid start/stop, reverse. Direct drive (no gear reduction).  
• Requires 50 watt, 150 ohm resistor and 10 mfd, 330 VAC capacitor (not furn.). Dual output shaft 3/8" and 1/2" diam.

**SPECIFICATIONS**

- Voltage 120 AC
- RPM 72
- Amps 1.3
- 1 phase
- 60 cycles
- Cont. duty
- Reversible
- 760 in. oz. torque starting
- 1400 in. oz. holding
- Size 4 1/4" diam. x 10"
- Shpg. 19 lbs.



**Ceiling Fan  
Motor**

ITEM 10-1134

**\$12.88**

• New GE. 3 lug mount or hang from threaded end cap. Requires 5 mfd capacitor.

**SPECIFICATIONS**

- Voltage 115 AC
- RPM 225
- Amps 1
- Cont. duty
- Reversible
- Hollow shaft 17 mm dia. x 1 1/2" w/flat
- Size 5" diam. x 3"
- Shpg. 10 lbs.



**Single Shaft Motors**

- New single shaft motors are ideal replacement for blowers and fans. Big savings on many different sizes and styles from various well known motor companies.
- All are air over continuous duty or open enclosure, single phase. All require a capacitor (10-1657 includes one). Rotation facing shaft.

All have 1/2" diam. shaft w/flat except 10-1657 which is 5/16".



**3 Hole Mount**

10-1707, 10-1710, 10-1121, 10-1716

Open Enclosure


ITEM	Mfg.	HP	Volts	Amps	RPM	Speed	Rot.	Shaft	Cap.	Size	Shpg.	Price
10-1327	GE	1/20	115	0.90	1000	3	CCW	6 3/4"	4	5" d. x 5 1/2"	7	\$15.99
10-1657	FASCO	1/16	460	0.30	3450	1	CCW	3"	incl.	3 1/4" d. x 5"	6	\$11.99
10-1710 *	GE	1/10	230	0.6	1075	1	CW	4 1/2"	4	5 1/2" d. x 5"	10	\$16.99
10-1700	EMERSON	1/4	230	2.2	1050	1	CW	3 7/8"	10	5 5/8" d. x 5 7/8"	12	\$20.99
10-1699	FASCO	1/4	240	1.4	1100	3	CCW	5 1/2"	5	5 1/2" d. x 5"	13	\$24.99
10-1716 **	GE	1/4	277	1.3	1075	1	CW	3 1/2"	5	5 1/2" d. x 6"	14	\$14.99
10-1701	UNIV ELEC	1/3	208/230	2.6	920	3	CCW	2 1/2"	7	5 1/2" d. x 5"	17	\$21.99
10-1702	AO SMITH	1/3	230	1.4	750	2	CW	8 1/2"	7.5	5 1/2" d. x 6"	18	\$21.99
10-1704-A	EMERSON	1/3	380	1.15	930	1	CCW	3 5/16"	5	5 1/2" d. x 5"	15	\$14.99
10-1334	GE	1/3	400	1.4	825	2	CCW	2 1/2"	10	5 1/2" d. x 6"	16	\$15.50
10-1120	UNIV ELEC	1/2	208-230	5.9	945	3	CCW	2 1/2"	6	5 1/2" d. x 5 1/2"	17	\$28.99

\* TENV enclosure

\*\* Enclosed

**Dual Shaft Motors**

• All are air over continuous duty, single phase. Requires capacitor (not included), open enclosure. Shaft diam. 1/2" (lengths are shown in chart). Ideal replacement for blowers and fans. Motors indicated with asterisk (\*) have 3 bolt mount, ITEM 10-1663 has resilient base mount.

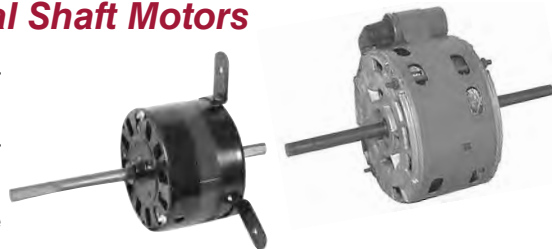

ITEM	Mfg.	HP	Volts	Amps	RPM	Speed	Rot.	Shafts	Cap.	Size	Shpg.	Price
10-1118 *	FASCO	1/20	115	2.5	1110	3	CW	2" 2 1/4"	4	5 1/2" d. x 5 1/2"	10	\$14.99
10-1660 *	FASCO	1/12	115	1.0	1070	2	CW	4 3/4" 1 7/8"	3	5" d. x 4"	9	\$18.99
10-1123 *	AO SMITH	1/12	208/230	0.8	1180	1	CCW	2 1/2" 3 3/4"	5	5 1/2" d. x 4"	12	\$15.49
10-1125 *	RMR CORP.	1/8	220	1.9	1200	2	CW	2 1/2" 1 3/8"	5	5 1/2" d. x 4"	13	\$16.79
10-1663	OLMO	1/6	115	2.4	1075	3	CCW	8 3/4" 6 5/8"	5	6" d. x 4 1/2"	15	\$19.99

**115 VAC 3 Sp.  
Fan Motor**

ITEM 10-2121

**\$5.99**

• New HOLMES Product Corp. Model F0508B2935M. Thermally protected.

**SPECIFICATIONS**

- Voltage 115 VAC
- Amps 2.1
- HP 1/15
- RPM 1150 max. unloaded
- Rotation CW
- Enclosure open
- Duty continuous
- 2 bolt mount on 5.6" ctrs.
- Shaft 3/8" diam. x 1 5/16"
- Size 5 1/8" x 5 1/8" x 2 1/8"
- Shpg. 5 lbs.



**Disc/Belt Sander  
Replacement  
Motor**

ITEM 10-1791

**\$36.95**

• New. Disc belt sander replacement motor made for a major national brand of power tools. Requires start relay (not included).

**SPECIFICATIONS**

- Voltage 120 AC
- Amps 4
- RPM 3450
- Shaft 5/8" x 1 1/4" serrated
- Rotation CCW
- Shpg. 10 lbs.

